

Engineering Division

TOWN OF ARLINGTON
Department of Public Works
51 Grove Street
Arlington, Massachusetts 02476
Office (781) 316-3320 Fax (781) 316-3281

July, 2017

Bid 17-22 2017 Construction of Wheelchair Ramps and Sidewalks - Various Locations

Addendum #1 Contractor Question Responses

1. **Q: Item #23 on pg.9, COBBLE STONE FURNISHED BY CONTRACT, not clear of definition and would like clarity and typical detail.**

A: Cobblestones as specified 4"- 6"W X 6"- 8"D X 10"-12"L to be installed on edge and will be paid by linear foot as measured along back edge of sidewalk. See Figure #1.

2. **Q: Item #24 on pg.9, FURNISH AND INSTALL FIELD STONE, Payment will be made by cubic yard.**

A: Payment will be made by the cubic foot as it is on the bid sheet.

3. **Q: Item #26 on pg.9, MORTAR BENEATH THUMB WALLS, What is meant by 4" of mortar.**

A. Remove soil between the bottom of thumb wall and the new sidewalk to a minimum of 4" under the thumb wall, then replace with mortar. See figure #2 & #3.

PIAUES 41

METALLES LEUANT BY LINSHARK FOOT

COBBLE STONE INSTALLED






FIGURE 22



FIGURE #3

CEMENT THUMB WALL

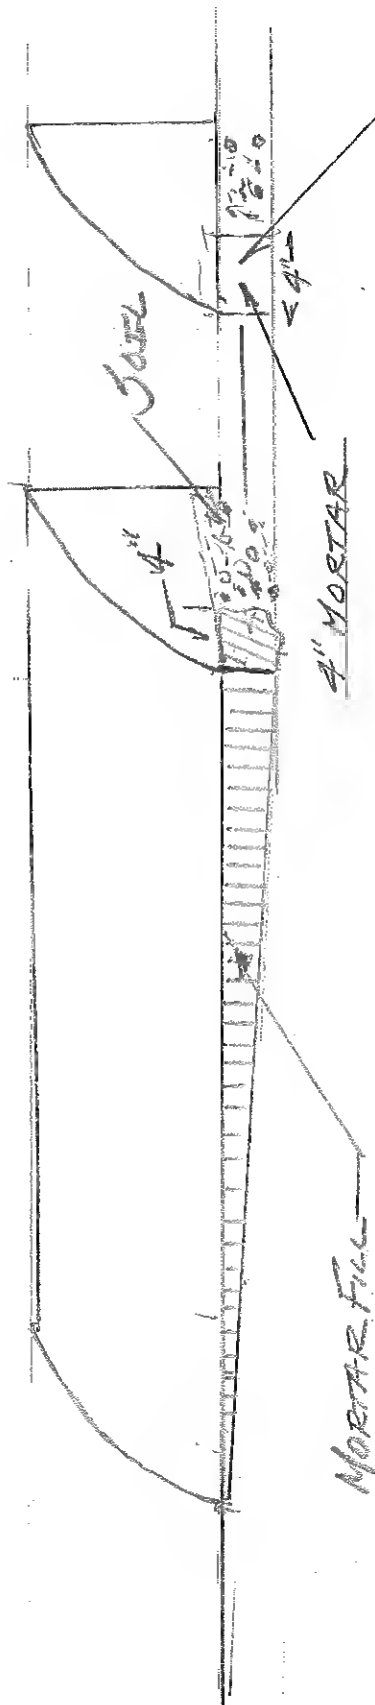

* CLEAN OUT DIRT & DEBRIS TO A
MINIMUM OF 4"